


The lightweight PULLER-CLAMP is easy to transport and assemble. This makes the unit very practical for close work in a trench or high up on a pipe rack.

Quick and simple adjustments allow the puller to be properly sized to fit a good range of pipe diameters. A metric O.D. model is also available for specialty piping.

A forward tug on the handle locks the puller tightly to the pipe surface. A tug in the reverse direction will unlock it for removal or adjustment.

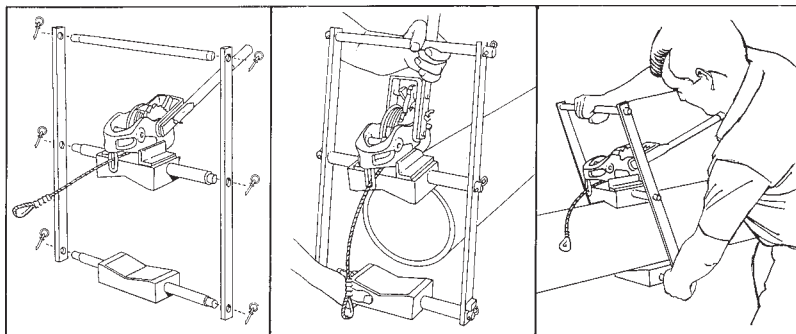

A powerful winch produces the force necessary to bottom out any solvent cemented pipe and fitting. The winch has an interlocking pawl system that will not slip even if wet or oily.

Choose the proper fitting attachment as needed. The attachments have been uniquely designed to fit a wide variety of pipe fittings.

The puller will operate in a horizontal or vertical position. The winch will operate smoothly right side up or upside down. Solvent cemented joints can be left locked up until the cement begins to "set", no backing off of the fitting.